

FILTRATION EQUIPMENT

"Y" Strainers Code 36H

Conflow is renowned the world over as the leading supplier of specialist components and systems for dust suppression, fire suppression and all aspects of water control in underground coal Mining.

Today Conflow products can be found operating both on the surface and underground in all the major mining industries, from coal to gold, in more than 30 countries around the world. Furthermore, wherever minerals are moved in bulk – such as quarries, power stations and steel works - Conflow products are helping to reduce the negative impact on the local environment.

At Conflow our aim is to provide you with a comprehensive range of services to meet your individual needs.



Description

The **Conflow Code 36H** - "Y" Strainers are robust in construction and a variety of screening elements are available to suit particular fluid conditions.

The larger sizes of this particular range of strainers can be adapted to suit victaulic, screwed or flanged connections as required.

Typical Applications

- First step in water filtration on main line and feed lines
- Last chance filters on dust suppression links

Features

- Sizes from 1/2" to 4" available.
- Maximum working pressure 70 bar (for sizes up to 1 1/2"), 25bar (2") and 55 bar (4")
- Robust cast strainer body.
- Mesh Screen Sizes:
 - Standard 0.031"
 - Medium 0.021"
 - Course 0.062"
 - Fine 200 micron



FILTRATION EQUIPMENT

"Y" Strainers

Code 36H

Specifications

Dimension	Unit	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	4"
A	mm	98	121	149	178	197	237	406
B	mm	77	93	118	150	162	179	332
C	mm	51	58	83	95	110	134	204
Weight	Kg	0.8	1.5	-	4.5	15.5	15.5	-

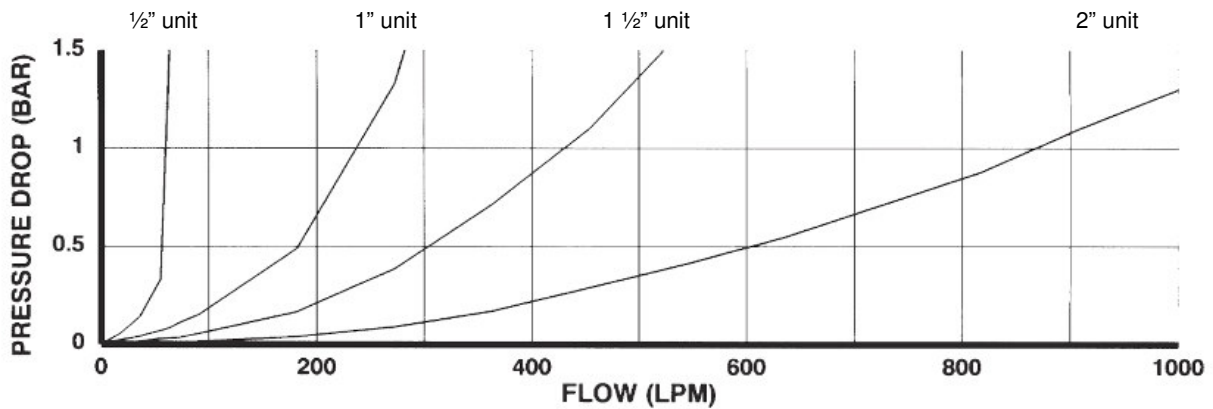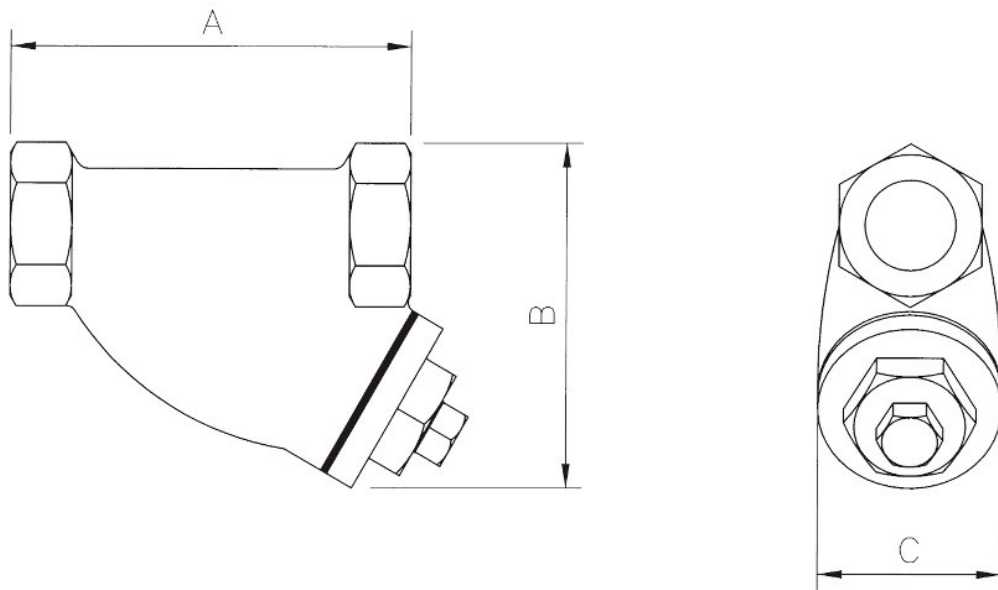

The information on this data sheet is accurate to the best of Conflow's knowledge, however we reserve the right to alter the product specification at any time. For any specific updated detail, please contact us.